


加工精度

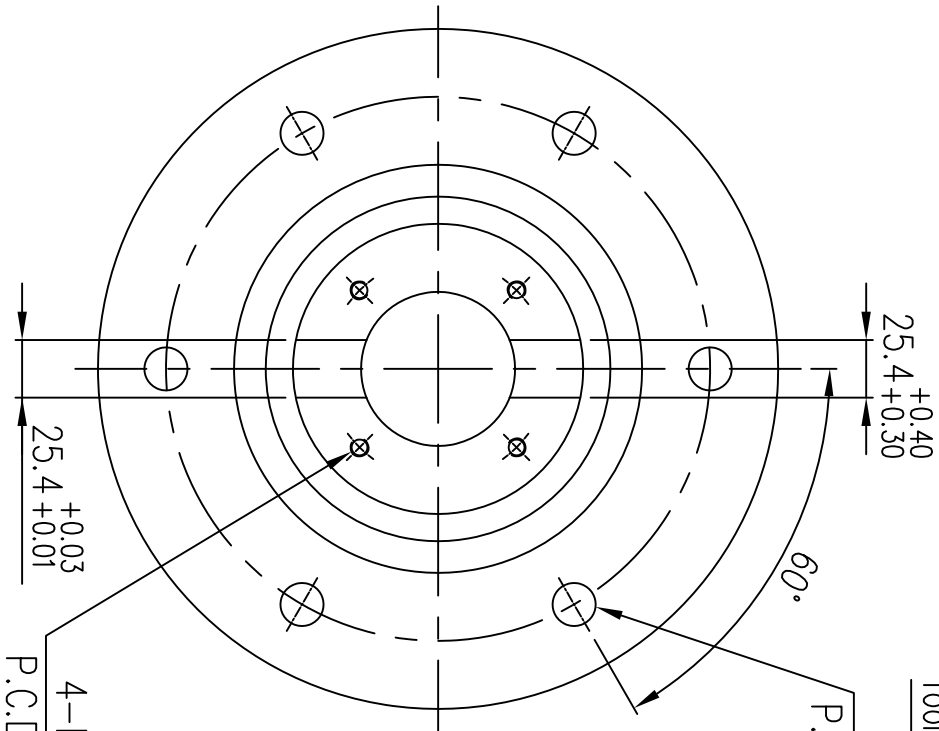

Tool disassembly and assembly device.

The disassembly and assembly hole of the tool is covered dustproofly.

Also #2 T-hexagon wrench.

P.C.D.  $\phi 240$

$\phi 300 \pm 0.05$

$\phi 180^{+0.03}_{-0.01}$

$\phi 152$

$\phi 128$

6.5

20

30

$\phi 230$

10°

#50

$\phi 128.57$

$\phi 174$

$\phi 210$

4-M8  
P.C.D.  $\phi 98$

16

173

310

360

57

50

50

20

12.7

K73-01(E)

Pull Stud Select	BT(M24X3.0)
	NT(M24X3.0) NT(1")

Max. Cutter Dia	$\phi 150(6")$
Max. Torque	1200N.m
Max. Power	63kw
Max. Revolving	2000rpm
Main Spindle Steering	Right Turn
Accessories : T-Screw x6	M18XP2.5X87L

Patented in several countries  
Copy is absolutely prohibited.